

SAM4s Ellix 20

Two-Color Thermal Receipt Printer



Affordable mini-printers from SAM4s – builders of high quality POS equipment for over twenty years.



Enjoy crisp high quality receipts from the fastest POS printer available today. Available in two-tone ivory/gray or dark gray color, the Ellix 20 will complement your SAM4s system, is compatible with many popular POS systems, and fits a wide variety of mini-printer applications.

- 220mm per Second Print Speed
- Drop and Print Paper Loading
- Prints Mono or Two-Color
- Stores/Prints Coupon and Logo Images
- Prints Watermarks
- Standard Auto-Cutter
- Serial, Parallel, USB, Ethernet Interface



SAM4s Ellix 20 Thermal Receipt Printer



Also from SAM4s . . .
The extremely cost-effective and compact SAM4s Ellix 10 printer meets all basic receipt printing needs, producing 58mm receipts at 20 lines per second.

Additional Features

- Black/Red or Black/Blue Two-Color Printing Available
- Accepts 2" (58mm) or 3" (80mm) Thermal Paper Rolls
- Standard Near-End Paper Sensor
- Provides Printer Usage Statistics Report
- Stores Up to 255 Images (384 Kbytes) in Non-Volatile Memory
- Easy-to-Use Utilities Load Images and Watermarks

Specifications

Max. Print Speed – Mono 80mm:	220mm / Second (52 Lines/Second)
Mono 58mm:	150mm / Second (36 Lines/Second)
Two-Color:	100mm / Second (24 Lines/Second)
Printing Method:	Direct Thermal
Resolution:	180 dpi
Characters Per Line – Font A:	42 (80mm) / 30 (58mm)
Font B:	56 (80mm) / 40 (58mm)
Characters Size:	Font A: 12 x 24; Font B: 9 x 17
Paper Size:	Maximum 58mm / 80mm Wide x 83mm Dia.
Paper Supply:	Drop and Print
Reliability MCBF – Printer:	70,000,000 Lines
Auto Cutter:	1,500,000 Cuts
TPH:	1 x 10 ⁸ Pulse or 100km
Character Set:	Alphanumeric: 95; International: 37
Extended Graphic:	128 x 11 Page, Korean
Bar Code:	UPC-A, UPC-E, EAN8, EAN13, Code 39, Code 93, Code 128, ITF, CODABAR, PDF417
Compatibility:	ESC/POS™, Star™
Interface:	Serial, Parallel, USB, Ethernet
Driver:	Windows, OPOS
Buzzer:	Internal (Standard)
Drawer Port:	2 Port (+24V)
Data Buffer:	4KB
Power Supply:	AC 90 ~ 264 V Adapter Included
Current/Power Usage:	1.5A / 27W
Operating Temperature:	40° ~ 114°F (5° ~ 45°C)
Operating Humidity:	10% ~ 90% RH
Dimensions:	5-11/16"W x 7-7/8"L x 5-1/2"H (145mmW x 200mmL x 140mmH)
Weight:	3.75 lbs. (1.7 kg)
EMC – Safety:	FCC Class A, CE – TUV/GS, CE, CB, cTUVus
Options:	Wall Mount Bracket, 58mm Paper Partition, Kitchen Buzzer


All product features are subject to change without notice.

Company and product names are trademarks or registered trademarks of their respective companies.

SAM4s

Printed in U.S.A.

Lit-93

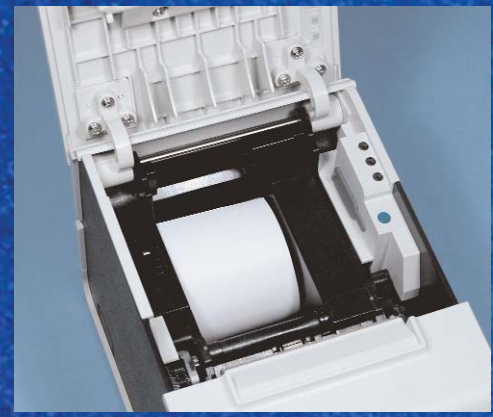

Drop and Print Paper Loading and Selectable Paper Width



Standard Cable Management Cover



Operates Standing or Wall Mounted



Easy to Change Interface Modules